

TECHNICAL DATA SHEET

Power - Alkaline Batteries



GENERAL INFORMATION

KF number	KF10848
Description	AA Alkaline Batteries - shrink 20
Country of origin	China
Intrastat number	85065090
Customs code	85065090

PACKAGING INFORMATION

Barcode 570583110848

BOSS notation Pack 20

Packaging contents: 20

Weight in KG

Barcode 570600210848

BOSS notation 12 x Pack 20

Packaging contents: 240

Weight in KG

Barcode 570600310848

BOSS notation 4 x 12 x Pack 20

Packaging contents: 960

Weight in KG

Please note that weights and dimensions are indicative and can have slight variations due to each own manufacturing



INTERACTION-CONNECT S.A
J-B De Ghellincklaan 23 Box 101
B-9051 Gent, Belgium
www.q-connect.com

info@interaction-connect.com
Tel.: +32 (0)9 380 82 48

KF10848 - Q-Connect Alkaline Batteries, Mignon AA|LR6|1.5V, Pack 20

1. Description

LR6/SIZE AA/AM-3, the product is manufactured under standard IEC60086-1,2:2015. It belongs to alkaline battery and is free of mercury and cadmium.


2. Use

Radio, toy, recorder, razor, calculator etc.

3. Chemical system

Zn / KOH / MnO₂

4. Dimensions (mm)

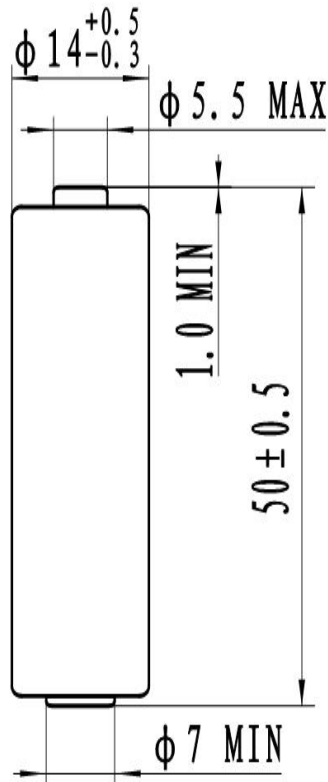

5. Labeling

Aluminum foil jacket

6. Weight

22.3g min.

7. Marking

Generally, each battery will be marked the following information: model, trade mark, expiry date, polarity of terminals, nominal voltage and supplier. As a matter of fact, the detail of marking may be varied to meet client's requirements.



INTERACTION-CONNECT S.A
 J-B De Ghellincklaan 23 Box 101
 B-9051 Gent, Belgium
 www.q-connect.com

info@interaction-connect.com
 Tel.: +32 (0)9 380 82 48

8. Appearance and terminals

Appearance and mark shall be clear and intact, there is no distortion, no corrosion, the terminals shall be made and maintain good electrical connection.

9. Nominal voltage

1.5V

10. Electrical performance

Discharge mode	Off load voltage(V)	On load Voltage(V)	duration		Capacity mAh
			standard	test data	
1500mw for 2S, then 650mw for 28s, then 0 mw for 55 min to 1.05V	1.5~1.68	1.58	40 pulses	70pulses	/
3.9Ω, 4min/h, 8h/d to 0.9V		1.55	230min	390m	2000
3.9 Ω, 1h/d to 0.8V		1.55	5h	7.2h	2100
250mA, 1h/d to 0.9V		1.58	5h	7h	/
100mA, 1h/d to 0.9V		1.60	15h	21h	/
50mA, 1d on, 7h off for 24h per day to 1.0V		1.59	30h	45h	/

Remark: test condition: temperature 20±2°C, RH 45~75%.

11. Leakage proof

At temperature 20 ± 2°C, RH 45~75%, with loading resistance 10 Ω, continuously discharging for 48 hours, there is no electrolyte, sealer or other internal component appearing on the outer surface of tested battery.

12. Storage characteristic

Stored under the condition T: 20 ± 2°C, RH 45~75% for 12 months, the capacity of battery is no less than 90% value of fresh one.

13. Shelf life

4 years.

14. The following are a part of packing styles, we are willing to adopt any style in compliance with client's order.

Pack	Inner box (pcs/unit)	Carton box (pcs/unit)
Shrink	40	720
Blister	40	720

15. Warning

Don't install backwards, recharge or dispose of in fire, the battery may leak or explode. Never short-circuit the battery to avoid damage caused by released heat.